



Tiziano 200W

Discharge Daylight Portable Open-Face

MOD. 2200

The TIZIANO 200W is a focusable open face portable luminaire featuring an anatomic pistol grip both suitable for hand held operations and stand mounting. Stirrup available as an optional accessory. Rear thumb-wheel focusing and ON-OFF push button can be activated by the same hand while holding the fixture.



CONSTRUCTION:

- Solid and slotted, octagonal shaped stainless steel sheet, with flat corners. Safety glass front frame and die-cast accessory clips

FINISHING:

- High temperature, heat resistant, electrostatically deposited black epoxy paint

SAFETY

- Power cut off microswitch activated in case of protected glass breakage or removal.

DISCHARGE LAMP TYPES:

- Single ended Hot Re-strike 200 W discharge lamps

REFLECTOR

- Sandblasted anodized alluminum

LAMP HOLDER

- GY 9,5 special

IGNITER

- High voltage igniter protected by thermally insulated internal compartment.

SWITCH


- On/Off push button close to pistol grip with "power on" red LED indicator

FOCUS

- Operated by rear thumb wheel

HAND GRIP

- Pistol grip for hand held operation and/or stand mounting with 16mm. (5/8") socket with loking knob.

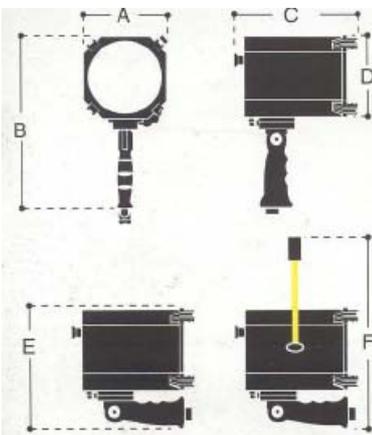

A	138 mm
B	280 mm
C	200 mm
D	138 mm
E	190 mm
F	345 mm
WGT	1,8 Kg (*)

PHOTOMETRIC DATA TIZIANO 200 W

Values measured with: MSR 200 HR lamp

METERS					
TYPICAL DISTANCES					
	3 mt	6 mt	9 mt	12 mt	
LIGHT CENTER VALUES		Candle Power		LUX	
SPOT	67.142	7.460	1.865	829	466
FLOOD	15.107	1.679	420	187	105
LUX AT ANY DISTANCE = Candle Power : [Distance(in m.)] ²					
BEAM ANGLE (50% of center value):					
BEAM DIAMETER in meters					
SPOT	14,5°	0,8 mt	1,5 mt	2,3 mt	3,1 mt
FLOOD	42,3°	2,3 mt	4,6 mt	7,0 mt	9,3 mt


(*) with 1,5 m. cable



Tiziano 200W

Portable Sun-Gun Kits

MOD. 2200.610 / 2200.620 / 2200.630

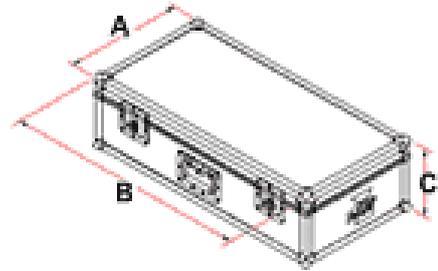

Dimensions	
A	483 mm
B	584 mm
C	229 mm

Weights	
2200.610	25,5 Kg
2200.620	21,2 kg
2200.630	23,1 kg

Mod. NO. 2200.610
I Tiziano 200W Kit, LEAD Battery Pack and Mains Operation Includes:

- I XTiziano 200 W (2200) OPEN FACE with 1,5 m cable
- I X D.C. DEB 200W Flicker free electronic ballast 24/30V Battery Operation (2505. 500)
- I X Four Leaf Barndoors (2206.100)
- I X Colorframe (2207. 100)
- I X Cable Head to Ballast 200/400W, 2,5 m (2208.100)
- I X Cable set (2208.120 + 2208.130)
- I X Four Piece Scrim Set (2209.100)
- I X Portable LEAD Dryfit Battery Pack, 30V. 9,5Ah. RC26
- I X Mains adapter for DEB 200W DC/Fully automatic battery charger for 24V. or 30V LEAD batteries (5028.100)
- I X MSR 200W/HR Lamp.
- I X fly case for the complete kit (2202.110)

Mod. NO. 2200.620
I Tiziano 200W Kit, NI-Cad Belt Battery Operation Includes:

- I XTiziano 200 W (2200) OPEN FACE with 1,5 m cable
- I X D.C. DEB 200W Flicker free electronic ballast 24/30V Battery Operation (2505. 500)
- I X Four Leaf Barndoors (2206.100)
- I X Colorframe (2207. 100)
- I X Cable Head to Ballast 200/400W, 2,5 m (2208.100)
- I X Cable (2208.120)
- I X Four Piece Scrim Set (2209.100)
- I X Ni-Cad Belt Battery (2210.110)
- I X MSR 200W/HR Lamp.
- I X fly case for the complete kit (2202.110)

Mod. NO. 2200.630
I Tiziano 200W Kit, NI-Cad Belt Battery and Mains Operation Includes:

- Same kit as 2200.620 with the following additional equipment:
- I X Mains adapter for DEB 200W DC/Fully automatic battery charger for 24V. or 30V LEAD batteries (5028.100)
 - I X Cable (2208.130)